

## XGA Stackable Installation Projector

**Pro9510L**



Equipped with stacking and 360-degree projection, the Pro9510L showcases its versatile projection capabilities for fulfilling professional and creative application requirements. Pro9510L's centered lens boasts 6,200 lumens and XGA resolution, with multiple adjustment options for horizontal & vertical lens shift, 1.7x optical zoom, HV keystone, 4-corner, and 12V trigger, offering flexible and easy installation. To ensure its reliability, features such as an advanced sealed optical engine, wire-netting-covered lamp, and waveform air filter make it more durable and safeguard it against damage caused by regular usage. Powered by SuperColor™, it provides amazing colors and great contrast for images while utilizing auto power on, cell phone remote control (With vRemote app), and network management features for easy management. With its capability of supporting a wide range of digital and analog inputs, the Pro9510L is the ideal projector for commercial installations and large venues.

### **Key Features:**


- 6200 ANSI Lumens**
- XGA Native Resolution**
- Centered Lens**
- 360 degree Projection**
- 1.7x Optical Zoom**
- Stacking**
- HV Lens shift**

### **Designed for:**

**Installation**

# XGA Stackable Installation Projector

**Pro9510L**

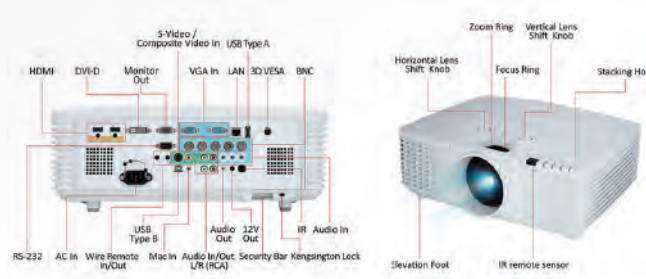

## Specifications

<b>PRODUCT SPECIFICATION</b>	Resolution	1024x768
	Brightness (ANSI Lumens)	6200lm
	Contrast (with Dynamic Contrast Ratio)	8000: 1
	Lamp Hour (Normal / Eco / DynamicEco)	1500hrs / 3500hrs
	Throw Ratio in Meters (Wide ~ Tele)	1.3~2.21
	Lens Shift	Yes
	Optical Zoom	1.7x
	Digital Zoom	0.8x~2.0x
	Screen Size	22.3"~378.6"
	Projection Offset	112%~124%
	Display Colours	1.07 Billion Colors (30 bits per color)
	Keystone	HV
	Noise min (Normal / Eco)	31 dB
	Speaker	7W x2
<b>INPUT CONNECTIVITY</b>	HDMI/MHL	1
	HDMI In	1
	VGA-in	2
	Component Input	2 (Share with VGA-in)
	S-Video	1
	Composite Input	1
	Audio-in (3.5mm)	3
	Audio-in (RCA pair)	1
	USB Type A	1 (Only charging)
	Mini USB	1 (Service)
	Microphone in (3.5mm)	1
	BNC	1
	Wire Remote in	1
	DVI-D	1
<b>OUTPUT CONNECTIVITY</b>	VGA-out	1
	Audio-out (3.5mm)	1
	Audio-out (RCA pair)	1
	Wire Remote out	1
<b>CONTROL</b>	RS232 (9 pin)	1
	Network Mangment (LAN cable)	1
	12V Power Trigger	1
	3D VESA	1
<b>DIMENSIONS AND POWER</b>	Dimension (WxDxH)	445 mm(W) x 325.5 mm(D) x147.8 mm(H)
	Net Weight	17.51" (W) x 12.81" (D) x 5.82" (H)
	Power Source	8.29 kg (18.26 lb)
	Power Consumption	100~240Vac 50/60Hz
<b>SUPPLIED ACCESSORIES</b>	Power cord	1
	VGA cable	1
	Remote Control (with batteries)	1
	Quick Start Guide & CD	1
<b>REGULATIONS</b>		Mexico Energy FCC / CE / EMC CB / CCC ROHS / REACH / SVHC / WEEE / ErP Mexico NOM / UL / CUL / PSB / RCM